

**DRAFT SOUTH AFRICAN STANDARD (DSS):
PUBLIC ENQUIRY STAGE****Document number** 61/60034-22/2**Reference** SANS 60034-22**Date of circulation** 2009-12-08**Closing date** 2010-01-08**Number and title:****SANS 60034-22, Rotating electrical machines Part 22: AC generators for reciprocating internal combustion (RIC) engine driven generating sets****Remarks:****PLEASE NOTE:**

- The technical committee, SABS TC61..... responsible for the preparation of this standard has reached consensus that the attached document should become a South African standard. It is now made available by way of public enquiry to all interested and affected parties for public comment, and to the technical committee members for record purposes. Any comments should be sent by the indicated closing date, either by mail, or by fax, or by e-mail to

**SABS Standards Division
Attention: Compliance and Development department
Private Bag X191
Pretoria
0001**

**Fax No.: (012) 344-1568 (for attention: dsscomments)
E-mail: dsscomments@sabs.co.za**

Any comment on the draft must contain in its heading the number of the clause/subclause to which it refers. A comment shall be well motivated and, where applicable, contain the proposed amended text.

- **The public enquiry stage will be repeated if the technical committee agrees to significant technical changes to the document as a result of public comment. Less urgent technical comments will be considered at the time of the next amendment.**

THIS DOCUMENT IS A DRAFT CIRCULATED FOR PUBLIC COMMENT. IT MAY NOT BE REFERRED TO AS A SOUTH AFRICAN STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT SOUTH AFRICAN STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN LAW.

ISBN 978-0-626-

SANS 60034-22:2010

Edition 2

IEC 60034-22:2009

Edition 2

SOUTH AFRICAN NATIONAL STANDARD

Rotating electrical machines

Part 22: AC generators for reciprocating internal combustion (RIC) engine driven generating sets

This national standard is the identical implementation of IEC 60034-22:2009 and is adopted with the permission of the International Electrotechnical Commission.

Published by SABS Standards Division
1 Dr Lategan Road Groenkloof ☒ Private Bag X191 Pretoria 0001
Tel: +27 12 428 7911 Fax: +27 12 344 1568

www.sabs.co.za

© SABS

SABS

SANS 60034-22:2010

Edition 2

IEC 60034-22:2009

Edition 2

Table of changes

Change No.	Date	Scope

National foreword

This South African standard was approved by National Committee SABS TC 61, *Rotating electrical machinery*, in accordance with procedures of the SABS Standards Division, in compliance with annex 3 of the WTO/TBT agreement.

This SANS document was published in xxxxx 2010.

This SANS document supersedes SANS 60034-22:1996 (edition 1).

Draft SA Standard



INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Rotating electrical machines –
Part 22: AC generators for reciprocating internal combustion (RIC) engine driven
generating sets**

**Machines électriques tournantes –
Partie 22: Génératrices à courant alternatif pour groupes électrogènes entraînés
par un moteur à combustion interne**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

R

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions	5
4 Rating.....	9
5 Limits of temperature and temperature rise	10
5.1 Base continuous rating	10
5.2 Peak continuous rating	10
6 Parallel operation.....	10
6.1 General	10
6.2 Effect of electromechanical vibration and its frequency.....	11
7 Special load conditions	11
7.1 General	11
7.2 Unbalanced load current.....	11
7.3 Sustained short-circuit current (see also 8.3)	11
7.4 Occasional excess current capability.....	11
7.5 Total harmonic distortion (THD)	11
7.6 Radio interference suppression.....	12
8 Asynchronous generators with excitation equipment.....	12
8.1 General	12
8.2 Rated speed and rated slip	12
8.3 Sustained short-circuit current	12
8.4 Range of voltage setting (see also 3.9)	12
8.5 Parallel operation (see also Clause 6).....	12
9 Operating limit values	12
10 Rating plate	13
Annex A (informative) AC generator transient voltage characteristic following a sudden change in load	15
Bibliography	20
Figure A.1 – Generator transient voltage versus time for sudden load application and removal: r.m.s. voltage versus time	17
Figure A.2 – Generator transient voltage versus time for sudden load applications: instantaneous voltage versus time.....	18
Figure A.3 – Performance curves (step loading) ($\cos \phi \leq 0,4$)	19
Table 1 – Operating limit values	13

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ROTATING ELECTRICAL MACHINES –

**Part 22: AC generators for reciprocating internal combustion (RIC)
engine driven generating sets**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60034-22 has been prepared by IEC technical committee 2: Rotating machinery.

This second edition cancels and replaces the first edition published in 1996 and constitutes a technical revision.

The technical changes with regard to the previous edition include:

- Clause 2: The standards which were not referenced in the text have been deleted.
- Clause 3: Technical and editorial changes to many of the definitions have been made.
- Clause 4: In the NOTE, the quantity T_L has been replaced by TL .
- Clause 7: Technical and editorial changes to many clauses have been made.
- Clause 9: Table 1 has been revised.
- Annex A: This annex has been revised.

The text of this standard is based on the following documents:

FDIS	Report on voting
2/1568/FDIS	2/1573/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 60034 series, under the general title, *Rotating electrical machines*, can be found on the IEC website.

NOTE A table of cross-references of all IEC TC 2 publications can be found in the IEC TC 2 dashboard on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

Draft SA Standard

ROTATING ELECTRICAL MACHINES –

Part 22: AC generators for reciprocating internal combustion (RIC) engine driven generating sets

1 Scope

This part of IEC 60034 establishes the principal characteristics of a.c. generators under the control of their voltage regulators when used for reciprocating internal combustion (RIC) engine driven generating set applications and supplements the requirements given in IEC 60034-1. It covers the use of such generators for land and marine use, but excludes generating sets used on aircraft or used to propel land vehicles and locomotives.

NOTE 1 For some specific applications (e.g. essential hospital supplies, high-rise buildings, etc.) supplementary requirements may be necessary. The provisions of this standard should be regarded as a basis for such requirements.

NOTE 2 Attention is drawn to the need to take note of additional regulations or requirements imposed by various regulatory bodies. Such regulations or requirements may form the subject of agreement between the customer and the manufacturer when conditions of use of the end product invoke such requirements.

NOTE 3 Examples of regulatory authorities:

- classification societies, for generating sets used on ships and offshore installations;
- government agencies;
- inspection agencies, local utilities, etc.

Annex A discusses the behaviour of generators covered by this standard when subjected to sudden load changes.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60034-1:2004, *Rotating electrical machines – Part 1: Rating and performance*

IEC 60085, *Electrical insulation – Thermal evaluation and designation*

CISPR 11, *Industrial, scientific and medical equipment – Radio-frequency disturbance characteristics – Limits and methods of measurement*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply:

NOTE 1 In this standard, suffix “N” is used for “rated” in accordance with IEC 60027-1 and IEC 60027-4 whereas in ISO 8528, suffix “r” is so used.

NOTE 2 Voltage terms relate to a generator running at constant (rated) speed under the control of the normal excitation and voltage control system.

3.1 rated output

S_N

the product of the rated r.m.s. voltage, the rated r.m.s. current and a constant m , expressed in volt-amperes (VA) or its decimal multiples

where

$m = 1$ for single-phase;

$m = \sqrt{2}$ for two-phase;

$m = \sqrt{3}$ for three-phase

3.2 rated active power

P_N

the product of the rated r.m.s. voltage, the in-phase component of the rated r.m.s. current and a constant m , expressed in watts (W) or its decimal multiples

where

$m = 1$ for single-phase;

$m = \sqrt{2}$ for two-phase;

$m = \sqrt{3}$ for three-phase

3.3 rated power factor

$\cos \phi_N$

the ratio of the rated active power to the rated output

$$\cos \phi_N = \frac{P_N}{S_N}$$

3.4 rated reactive power

Q_N

the geometrical difference of the rated apparent power and the rated active power expressed in volt-amperes reactive (var) or its decimal multiples

$$Q_N = \sqrt{(S_N^2 - P_N^2)}$$

3.5 rated speed of rotation

n_N

the speed of rotation necessary for voltage generation at rated frequency

NOTE 1 For a synchronous generator, the rated speed of rotation is given by:

$$n_N = \frac{f_N}{p}$$

where

p is the number of pole pairs;

f_N is the rated frequency (according to load requirements).

For an asynchronous generator the rated speed of rotation is given by:

$$n_N = \frac{f_N}{p} (1 - s_N)$$

where

p is the number of pole pairs;

f_N is the rated frequency (according to load requirements);

s_N is the rated slip.

NOTE 2 Since the slip of an asynchronous generator is always negative, the rated speed is above the synchronous speed.

3.6

rated slip

s_N

the difference between the synchronous speed and the rated speed of the rotor divided by the synchronous speed, when the generating set is giving its rated active power

$$s_N = \frac{\frac{f_N}{p} - n_N}{\frac{f_N}{p}}$$

NOTE Rated slip s_N is only relevant to an asynchronous generator.

3.7

rated voltage

U_N

the line-to-line voltage at the terminals of the generator at rated frequency

NOTE Rated voltage is the voltage assigned by the manufacturer for operating and performance characteristics.

3.8

no-load voltage

U_0

the line-to-line voltage at the terminals of the generator at rated frequency and no-load

3.9

range of voltage setting

ΔU_s

the range of possible upward and downward adjustment of voltage at generator terminals (ΔU_{sup} and ΔU_{sdo} , where U_{sup} is the upper limit of voltage setting and U_{sdo} is the lower limit of voltage setting) at rated frequency, for all loads between no-load and rated output.

$$\Delta U_s = |\Delta U_{sup}| + |\Delta U_{sdo}|$$

The voltage setting range is expressed as a percentage of the rated voltage.

a) upward range, ΔU_{sup}

$$\Delta U_{sup} = \frac{U_{sup} - U_N}{U_N} \times 100 \%$$

b) downward range, ΔU_{sdo}

$$\Delta U_{sdo} = \frac{U_{sdo} - U_N}{U_N} \times 100 \%$$

3.10**steady-state voltage tolerance band** ΔU ¹⁾

the agreed voltage band about the steady-state voltage that the voltage may reach within a given voltage recovery time after a specified sudden increase or decrease of load

3.11**steady-state voltage regulation** ΔU_{st} ¹⁾

the change in steady-state voltage for all load changes between no-load and rated output, taking into account the influence of temperature but not considering the effect of quadrature current compensation voltage droop.

NOTE The initial set voltage is usually rated voltage, but may be anywhere within the range of voltage setting, ΔU_s . See 3.9.

The steady-state voltage regulation is expressed as a percentage of the rated voltage.

$$\Delta U_{st} = \frac{U_{st:\max} - U_{st:\min}}{U_N} \times 100\%$$

3.12**transient voltage regulation** δ_{dynU}

the maximum voltage change following a sudden change of load, expressed as a percentage of the rated voltage.

- a) With load increase

maximum transient voltage drop δ_{dynU}^-

the voltage drop when the generator, initially at rated voltage, is switched onto a symmetrical load which absorbs a specified current at rated voltage at a given power factor or range of power factors.

$$\delta_{dynU}^- = \frac{U_{dyn:\min} - U_N}{U_N} \times 100\%$$

- b) With load decrease

maximum transient voltage rise δ_{dynU}^+

the voltage rise when a specified load at a given power factor is suddenly switched off.

$$\delta_{dynU}^+ = \frac{U_{dyn:\max} - U_N}{U_N} \times 100\%$$

3.13**voltage recovery time** t_{rec} ¹⁾

the time interval from the time at which a load change is initiated (t_0) until the time when the voltage returns to and remains within the specified steady-state voltage tolerance band ($t_{u, in}$)

$$t_{rec} = (t_{u, in}) - (t_0)$$

1) For an explanation of these terms and examples of their use, see Annex A.

3.14**recovery voltage U_{rec}** ²⁾

the final steady-state voltage for a specified load condition

NOTE Recovery voltage is normally expressed as a percentage of the rated voltage. For loads in excess of rated, recovery voltage is limited by saturation and exciter-regulator field forcing capability.

3.15**voltage modulation** **\hat{U}_{mod}**

the quasi-periodic voltage variation (peak-to-valley) about a steady-state voltage having typical frequencies below the fundamental generation frequency expressed as a percentage of average peak voltage at rated frequency and uniform drive

$$\hat{U}_{mod} = 2 \times \frac{\hat{U}_{mod:max} - \hat{U}_{mod:min}}{\hat{U}_{mod:max} + \hat{U}_{mod:min}} \times 100 \%$$

3.16**voltage unbalance** **U_{ubal}**

the rms value of the unbalanced phase voltages between consecutive phases in a three-phase system that may occur.

Voltage unbalance is expressed as a percentage of the mean voltage

$$\hat{U}_{ubal} = \frac{\hat{U}_{max} - \hat{U}_{mean}}{\hat{U}_{mean}} \times 100 \%$$

3.17**voltage regulation characteristics**

curves of terminal voltage as a function of load current at a given power factor under steady-state conditions at rated speed without any manual adjustment of the voltage regulation system

3.18**relative thermal life expectancy factor** **TL**

the relative thermal life expectancy related to the thermal life expectancy in case of duty type S1 with rated output (see Annex A of IEC 60034-1)

4 Rating

The generator rating class shall be specified in accordance with IEC 60034-1. In the case of generators for R/C engine driven generating sets, continuous ratings (duty type S1) or ratings with discrete constant loads (duty type S10) are applicable.

For the purpose of this standard, the maximum continuous rating based on duty type S1 is named the base continuous rating (BR).

Additionally, for duty type S10, there is a peak continuous rating (PR), where the permissible generator temperature rises are increased by a specific amount according to the thermal classification.

NOTE In the case of duty type S10, operation at the peak continuous rating (PR) thermally ages the generator insulation systems at an increased rate. Quantity TL for the relative thermal life expectancy of the insulation system is therefore an important integral part of the rating class (see 4.2.10 of IEC 60034-1).

²⁾ For an explanation of these terms and examples of their use, see Annex A.

5 Limits of temperature and temperature rise

5.1 Base continuous rating

The generator shall be capable of delivering its base continuous rating (BR) over the whole range of operating conditions (e.g. minimum to maximum coolant temperatures) with total temperatures not exceeding the sum of 40 °C and the temperature rises specified in Table 6 of IEC 60034-1. See Note 1 below.

5.2 Peak continuous rating

At the generator peak continuous rating (PR), the total temperatures may be increased by the following allowances (see Notes 1 and 2).

Thermal classification in accordance with IEC 60085	Rating <5 MVA	Rating ≥5 MVA
A or E	15 °C	10 °C
B or F	20 °C	15 °C
H	25 °C	20 °C

For ambient temperatures below 10 °C, the limit of total temperature shall be reduced by 1 °C for each °C by which the ambient temperature is below 10 °C.

NOTE 1 The RIC engine output may vary with changes of ambient air temperature. In operation, the generator total temperature will depend upon its primary coolant temperature which is not necessarily related to the RIC engine inlet air temperature.

NOTE 2 When the generator operates at these higher temperatures, the generator insulation system will age thermally at between 2 to 6 times the rate which occurs at the generator base continuous rating temperature rise values (depending on the temperature increase and specific insulation system). For example, the thermal ageing relevant to operation for 1 h at peak continuous rating is approximately equal to that obtained with operation for 2 h to 6 h at base continuous rating. It is essential that the value of TL be determined by the manufacturer and marked on the rating plate in accordance with item b) of Clause 10.

6 Parallel operation

6.1 General

When running in parallel with other generator sets or with another source of supply, means shall be provided to ensure stable operation and correct sharing of reactive power.

This is most often effected by influencing the automatic voltage regulator by a sensing circuit with an additional reactive current component. This causes a voltage droop characteristic for reactive loads.

The grade of quadrature current compensation (QCC) voltage droop δ_{qcc} is the difference between the no-load voltage U_0 and the voltage at the rated current at the power factor zero (overexcited) U_Q when running isolated, expressed as a percentage of rated voltage U_N .

$$\delta_{qcc} = \frac{U_0 - U_Q}{U_N} \times 100 \%$$

NOTE 1 Unity power factor loads produce virtually no droop.

NOTE 2 Identical a.c. generators with identical excitation systems may operate in parallel without requiring voltage droop when their field windings are connected by equalizer links. Adequate reactive load sharing is achieved when there is correct active load sharing.

NOTE 3 When generating sets are operating in parallel with star points directly connected together, circulating currents may occur, particularly third harmonic currents. Circulating currents can increase the r.m.s. current which may reduce the thermal life expectancy of the insulation system.

6.2 Effect of electromechanical vibration and its frequency

It is the responsibility of the generating set manufacturer to ensure that the set shall operate stably in parallel with others, and the generator manufacturer shall collaborate as necessary to achieve this.

If there is a RIC engine torque irregularity at a frequency close to the electromechanical natural frequency, resonance will occur. The electrical natural frequency usually lies in the range of 1 Hz to 5 Hz, and hence resonance is most likely to arise with low speed (100 min^{-1} to 180 min^{-1}) RIC engine generator sets.

In such cases, the generating set manufacturer shall be prepared to give advice to the customer, assisted by a system analysis if necessary, and it is expected that the generator manufacturer will assist in such investigation.

7 Special load conditions

7.1 General

In addition to the conditions given in IEC 60034-1, the requirements given in 7.2 to 7.6 shall apply.

NOTE Consideration of the variation of these requirements from IEC 60034-1 will assist in the specification of special load conditions.

7.2 Unbalanced load current

Limiting values shall be in accordance with 7.2.3 of IEC 60034-1, except that generators with ratings up to 1 000 kVA, which are intended to be loaded between line and neutral, shall be capable of operating continuously with a negative phase sequence current up to and including 10 % of the rated current.

7.3 Sustained short-circuit current (see also 8.3)

Sustained short-circuit current is attained by an excitation system of a synchronous generator designed to provide a specified value of short-circuit current for a specified period of time. The value of sustained short-circuit current shall be decided by agreement between purchaser and manufacturer.

NOTE 1 Under short-circuit conditions on a synchronous generator, it may be necessary to sustain a minimum value of current (after the transient disturbance has ceased) for a sufficient time to ensure operation of the system's protective devices.

NOTE 2 Sustained short-circuit current is not necessary in cases where special relaying or other designs or means are employed to otherwise achieve selective protection, or where no selective protection is required.

7.4 Occasional excess current capability

Short-term excess current capability shall be in accordance with 9.3.2 of IEC 60034-1.

7.5 Total harmonic distortion (THD)

Limiting values of the total harmonic distortion of the line-to-line terminal voltages shall be in accordance with 9.11 of IEC 60034-1. When tested on open-circuit and at rated speed and voltage, the total harmonic distortion of the line-to-line terminal voltage shall not exceed 5 %.

7.6 Radio interference suppression

Limiting values of radio interference for continuous and clicking disturbances shall be in accordance with CISPR 11.

The grade of radio interference suppression involves the interface voltage, power and field strength. This shall be decided by agreement between purchaser and manufacturer.

8 Asynchronous generators with excitation equipment

8.1 General

Asynchronous generators need reactive power for voltage generation. When running in isolation, special equipment is necessary to provide their excitation, and this equipment also has to supply the reactive power demand of the connected load. The following terms and notes are valid for asynchronous generators which are not connected to the power grid for supplying the required reactive power but are provided with specially incorporated excitation equipment.

8.2 Rated speed and rated slip

(For definitions, see Clause 3.)

8.3 Sustained short-circuit current

(For definition, see 7.3.)

NOTE Asynchronous generators deliver an occasional sustained short-circuit current only when provided with especially equipped excitation sources.

8.4 Range of voltage setting (see also 3.9)

To provide a range of voltage adjustment for asynchronous generators special controllable excitation equipment is required.

8.5 Parallel operation (see also Clause 6)

Asynchronous generators, with special excitation equipment, running in parallel (to another such generator or to the mains), share the reactive power demand of the connected load according to the capabilities of their excitation systems.

Asynchronous generators share the active power demand of the connected load according to the speed of the prime mover.

9 Operating limit values

Four performance classes of major significance are given in table 1 to describe the generator characteristics. (For definitions of performance class, see ISO 8528-1, Clause 7.)

The values in Table 1 apply only to the generator, exciter and regulator operating at constant (rated) speed and starting from ambient temperature. The effect of the prime mover speed regulation may cause these values to differ from the values given in the table.

Table 1 – Operating limit values

Parameter	Symbol	Unit	Reference to subclause	Load change	Power factor (overexcited)	Performance class			
						G1	G2	G3	G4
Range of voltage setting	ΔU_s	%	3.9	a)	Rated	$\geq [\pm 5]$ d)			AMP c)
Steady-state voltage tolerance band	ΔU	%	3.10	a)	Rated	± 3	± 3	± 3	AMP
Steady-state voltage regulation	ΔU_{st}	%	3.11	b)	Rated	5	2,5	1	AMP
Maximum transient voltage drop f), g), h)	δ^-_{dynU}	%	3.12	0 to 100 % e)	Rated	-30	-24	-18	AMP
Maximum transient voltage rise f), g), h)	δ^+_{dynU}	%	3.12	100 % to 0 e)	Rated	35	25	20	AMP
Maximum voltage recovery time f), g)	t_{rec}	s	3.13	0 to 100 % e) 100 % to 0	$> 0 \leq 0,4$ Rated	2,5	1,5	1,5	AMP
Maximum voltage unbalance j)	U_{ubal}	%	3.16	i)	Rated	$\leq 1,0$	$\leq 1,0$	$\leq 1,0$	AMP

a) All loads between no-load and rated output (SN).
b) All load changes between no-load and rated output.
c) AMP = by agreement between manufacturer and purchaser.
d) Not necessary if parallel operation or fixed voltage setting is not required.
e) Load current at rated voltage, constant impedance load.
f) Other power factors and limit values may be by agreement.
g) It should be noted that the choice of a grade of transient voltage performance better than is actually necessary can result in a much larger generator. Since there is a fairly consistent relationship between transient voltage performance and the sub-transient reactances, the system fault level will also be increased.
h) Higher values may be applied to generators with rated outputs higher than 5 MVA and rotational speeds of 600 min^{-1} or less.
i) At no-load.
j) In case of parallel operation, these values will be reduced to 0,5.

10 Rating plate

The generator rating plate shall comply with the requirements of IEC 60034-1 and, in addition, the rated output and power factor and class of rating shall be combined as follows.

- a) Where a continuous rating based on duty type S1 is stated, the rated output shall be followed by the marking "BR" (base continuous rating), for example:

$$S_N = 22 \text{ kVA (cos } \phi \text{ 0,8 overexcited) BR}$$

- b) Where a rating with discrete constant loads based on duty type S10 is stated, the base continuous rating based on duty S1 shall be marked as in a). In addition, the peak rated output shall be shown followed by the marking "PR" (peak continuous rating), the maximum

running time per year (see 13.3.2 of ISO 8528-1:2005) and the value of the quantity TL , for example:

$$S_N = 24 \text{ kVA (cos } \phi \text{ 0,8 overexcited), PR, 300 h, } TL = 0,90$$

Upon request, the generator manufacturer shall provide the set manufacturer with a capability graph or set of values showing the permissible output of the generator set over the range of coolant temperature involved.

Draft SA Standard

Annex A (informative)

AC generator transient voltage characteristic following a sudden change in load

A.1 General

When a generator is subjected to a sudden load change there will be a resultant time varying change in terminal voltage. One function of the exciter-regulator system is to detect this change in terminal voltage, and to vary the field excitation as required to restore the terminal voltage. The maximum transient deviation in terminal voltage that occurs is a function of:

- a) the magnitude, power factor and rate of change of the applied load;
- b) the magnitude, power factor and current versus voltage characteristic of any initial load;
- c) the response time and voltage forcing capability of the exciter-regulator system;
- d) the RIC engine speed versus time following the sudden load change.

Transient voltage performance is therefore a system performance characteristic involving the generator, exciter, regulator and RIC engine and cannot be established on the basis of generator data alone. The scope of this annex covers only the generator and exciter-regulator system.

In selecting or applying generators, the maximum transient voltage deviation (voltage dip) following a sudden increase in load is often specified or requested. When requested by the customer, the generator manufacturer should furnish the expected transient voltage deviation, assuming either of the following criteria applies:

- the generator, exciter, and regulator are furnished as an integrated package by the a.c. generator manufacturer, or
- complete data defining the transient performance of the regulator (and exciter if applicable) is made available to the generator manufacturer.

When furnishing the expected transient voltage deviation, the following conditions shall be assumed unless otherwise specified:

- 1) constant speed (rated);
- 2) generator, exciter, regulator initially operating at no-load, rated voltage, starting from ambient temperature;
- 3) application of a constant impedance linear load as specified.

NOTE The expected transient voltage deviation refers to the average voltage change of all phases at the generator terminals, i.e. it takes no account of asymmetry which is influenced by factors outside the control of the generator manufacturer.

A.2 Voltage recorder performance

The following requirements are desirable:

- a) response time ≤ 1 ms;
- b) sensitivity ≥ 1 %/mm.

NOTE When peak-to-peak recording instruments are used, readings of the steady-state terminal voltage before and after load application should be made with an r.m.s.-indicating instrument in order to determine minimum transient voltage (see Figure A.2).

A.3 Examples

Strip charts of the output voltage as a function of time demonstrate the transient performance of the generator, exciter, regulation system to sudden changes in load. The entire voltage envelope should be recorded to determine the performance characteristics.

Strip charts representing two types of voltage recorder are illustrated in Figures A.1 and A.2. The labelled charts and sample calculations should be used as a guide to determine the generator-exciter-regulator performance when subjected to a sudden load change.

A.4 Motor starting loads

A.4.1 Test conditions

The following test conditions are recommended for demonstrating the capability of a synchronous generator, exciter and regulation system for starting a motor.

A.4.2 Load simulation


The load simulation consists of:

- a) Constant impedance (non-saturable reactive load).
- b) Power factor $\leq 0,4$ overexcited.

NOTE The current drawn by the simulated motor starting load should be corrected by the ratio U_N/U_{rec} whenever the generator terminal voltage fails to return to rated voltage. This value of current and rated terminal voltage should be used to determine the actual kVA load applied.


A.4.3 Temperature

The test should be conducted with the generator and excitation system initially at ambient temperature.

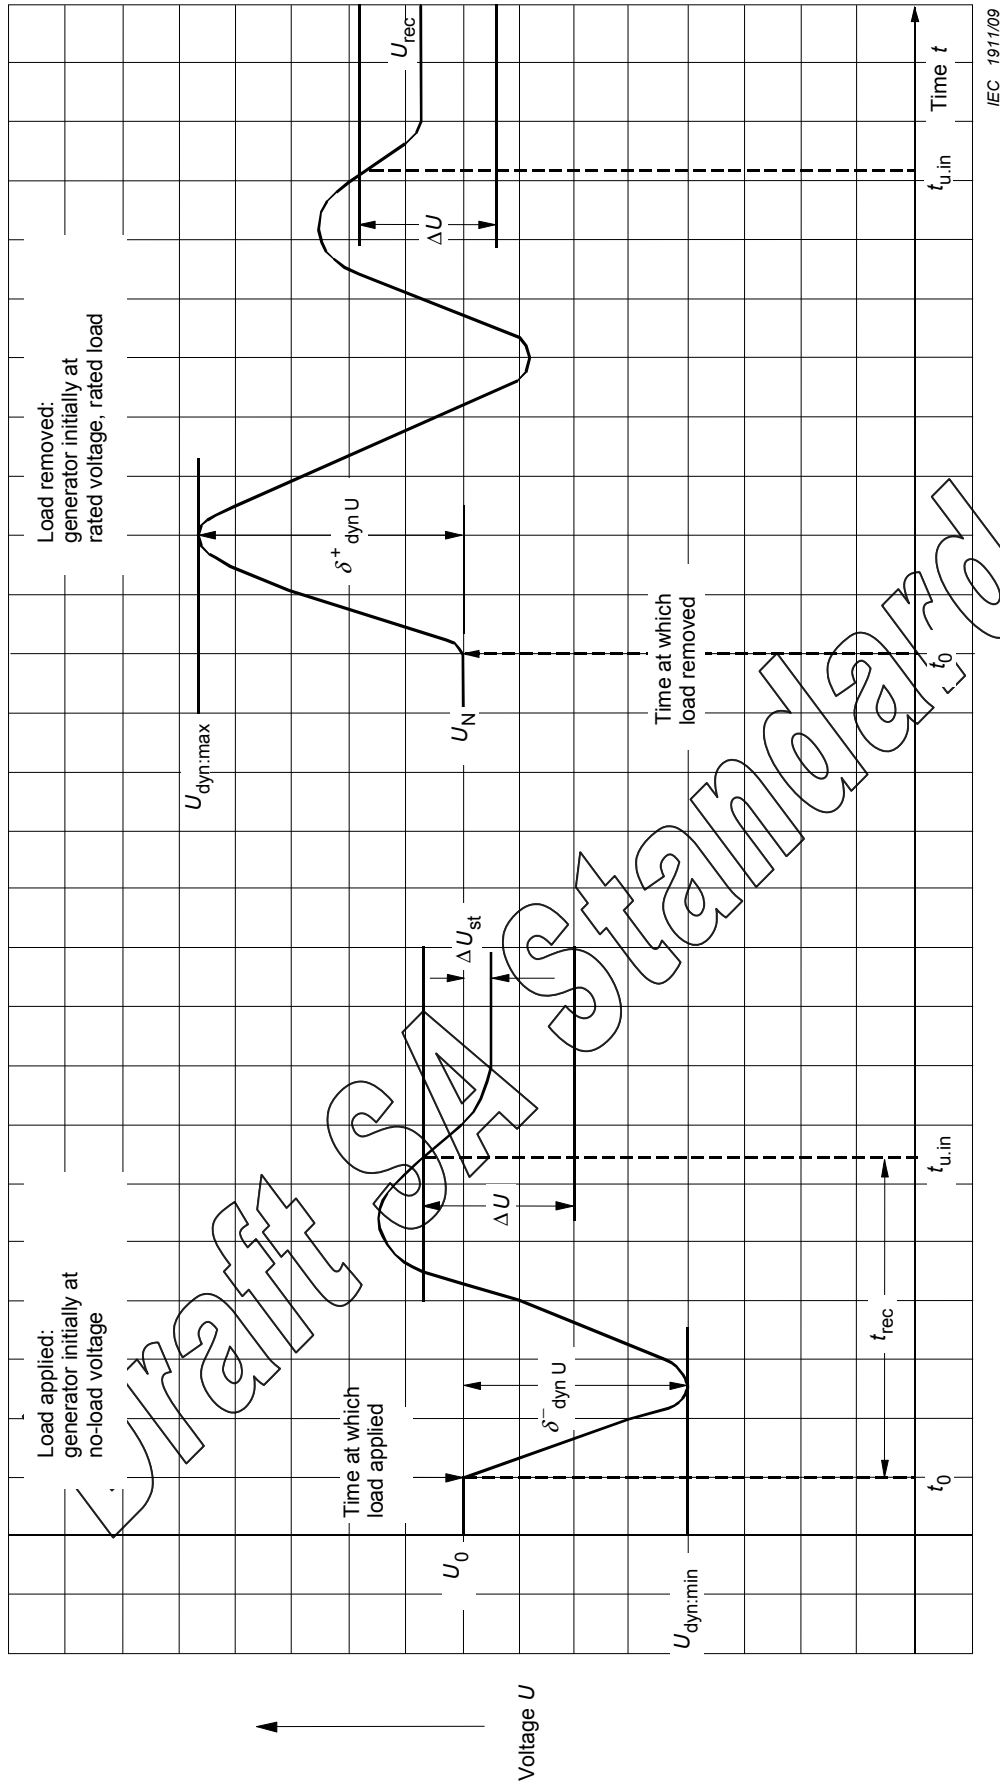

IEC 1911/09


Figure A.1 – Generator transient voltage versus time for sudden load application and removal: r.m.s. voltage versus time

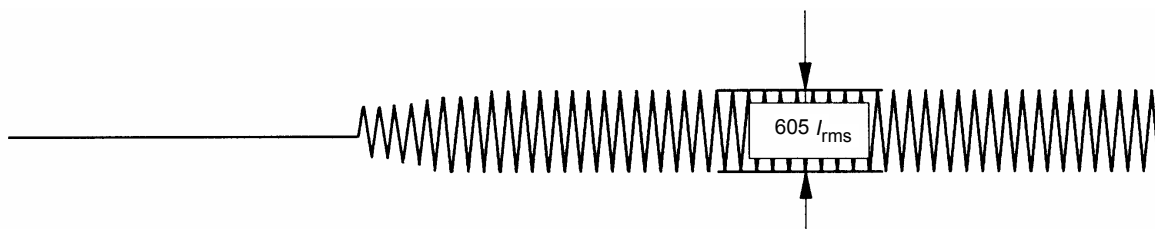

Oscillogram of load current

Current drawn by the load corrected to rated voltage:

$$I'_L = I_L \times \frac{U_N}{U_{rec}}$$

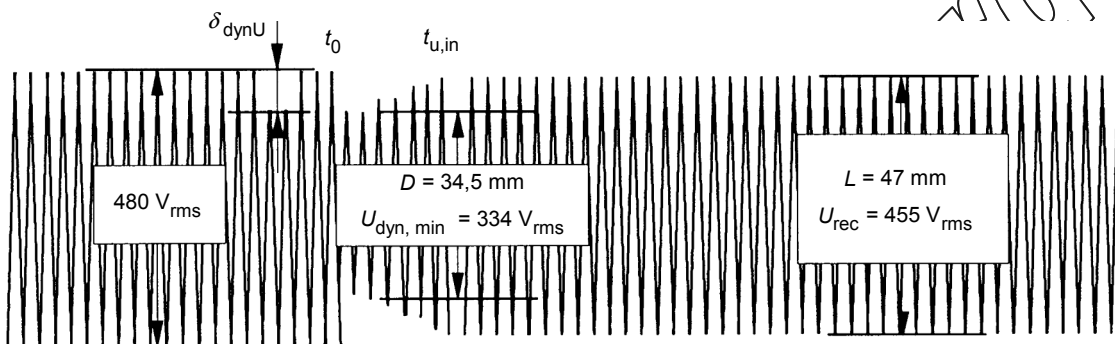

Oscillogram of terminal voltage

Key

- δ^-_{dynU} voltage dip
- U_N rated terminal voltage
- U_0 no-load voltage (r.m.s. voltmeter reading)
- L measured peak-to-peak amplitude of recovery voltage (mm)
- I'_L current drawn by the load corrected to rated voltage
- I_L real current drawn by the load
- U_{rec} steady-state voltmeter reading of recovery voltage (r.m.s.)
- D measured peak-to-peak amplitude of minimum transient voltage (mm)
- $U_{dyn,min}$ calculated minimum transient voltage
- t_0 instant at which load is applied
- $t_{u,in}$ instant of recovering to specified band

Example: $U_N = 480 \text{ V}; U_0 = 480 \text{ V}$ $U_{dyn,min} = \frac{D}{L} \times U_{rec} = \frac{34,5}{47} \times 455 = 334 \text{ V}$

$$\delta^-_{dynU} = \frac{U_{dyn,min} - U_N}{U_N} \times 100 = \frac{334 - 480}{480} \times 100 = -30,4 \%$$


Figure A.2 – Generator transient voltage versus time for sudden load applications: instantaneous voltage versus time

A.5 Presentation of data

Transient voltage regulation performance curves should be plotted as 'voltage dip' (in per cent of rated voltage) versus 'kVA load' (see Figure A.3).

The performance characteristics will vary considerably for broad voltage range generators when operating over the full range of their adjustment. Therefore, the per cent voltage dip versus kVA load curve provided for broad voltage range generators should show the performance at the extreme ends of the operating range; i.e., 208-240/416-480 V. For discrete voltage generators, the per cent voltage dip versus kVA load curve should show the performance at the discrete rated voltage(s).

Unless otherwise noted, the per cent voltage dip versus kVA load curve should provide a voltage recovery to at least 90 % of rated voltage. If the recovery voltage is less than 90 % of rated voltage, a point on the voltage dip curve beyond which the voltage will not recover to 90 % of voltage should be identified or a separate voltage recovery versus kVA load curve should be provided.

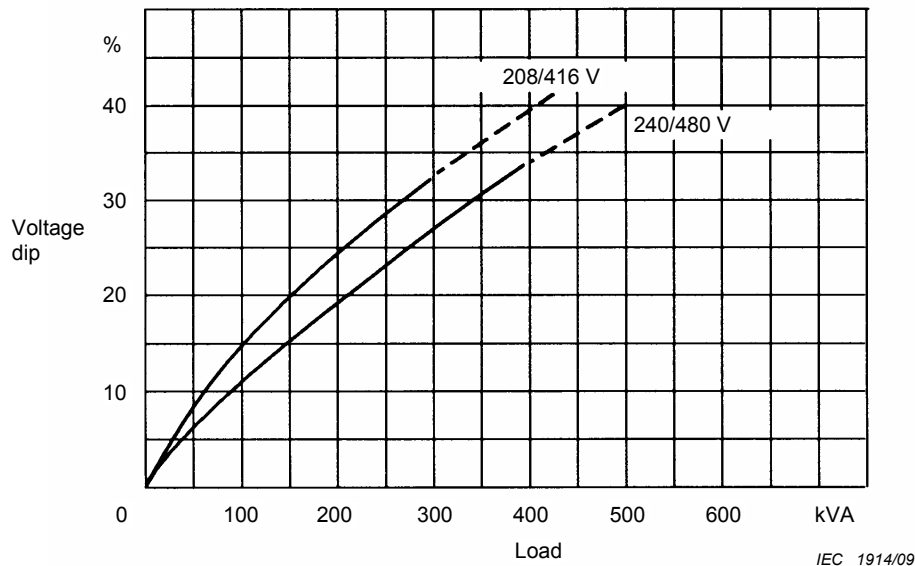

----- Indicates recovery voltage less than 90 %.

Figure A.3 – Performance curves (step loading) ($\cos \phi \leq 0,4$)

Bibliography

IEC 60027-1, *Letter symbols to be used in electrical technology – Part 1: General*

IEC 60027-4, *Letter symbols to be used in electrical technology – Part 4: Rotating electric machines*

IEC 60034-26, *Rotating electrical machines – Part 26: Effects of unbalanced voltages on the performance of the three-phase cage induction motors*

ISO 8528-1:2005, *Reciprocating internal combustion engine driven alternating current generating sets – Part 1: Application, ratings and performance*

Draft SA Standard